



Gate Repair Services

0114633025 0834522015

www.gates.co.za

NiceHansa Tub

400V



For sliding gates weighing up to 3500 kg.

Ideal for industrial use.

Irreversible electromechanical 400 Vac gear motor with built-in Mindy A500 control unit.

Powerful: 550 W absorbed output and a peak thrust of over 400 Nm.

Functionality and safety: programmable, electronic brake which prevents gate inertia; self-ventilated motor to increase the working cycles; optional PIU card to increase the basic functions; possibility of slowdown.

Maximum durability and silence: bronze and metal gears.


Advanced: Tub meets all requirements in terms of control, thanks to the functions which can be selected by means of dipswitches.

Practical: the lever release enables safe and simple operation.

Technical specifications

Code	TUB3500
Electrical data	
Power supply (Vac/Hz)*	400
Absorption (A)	1.65
Power (W)	550
Performance data	
Speed (m/min)	10.2
Force (N)	7740
Work cycle (cycles/day)	200
Dimensional and general data	
Protection level (IP)	44
Working temp. (°C Min/Max)	-20 ÷ +50
Dimensions (mm)	480x240x580 h
Weight (kg)	60

*Usable also at 60 Hz with consequent change in performance ratings.

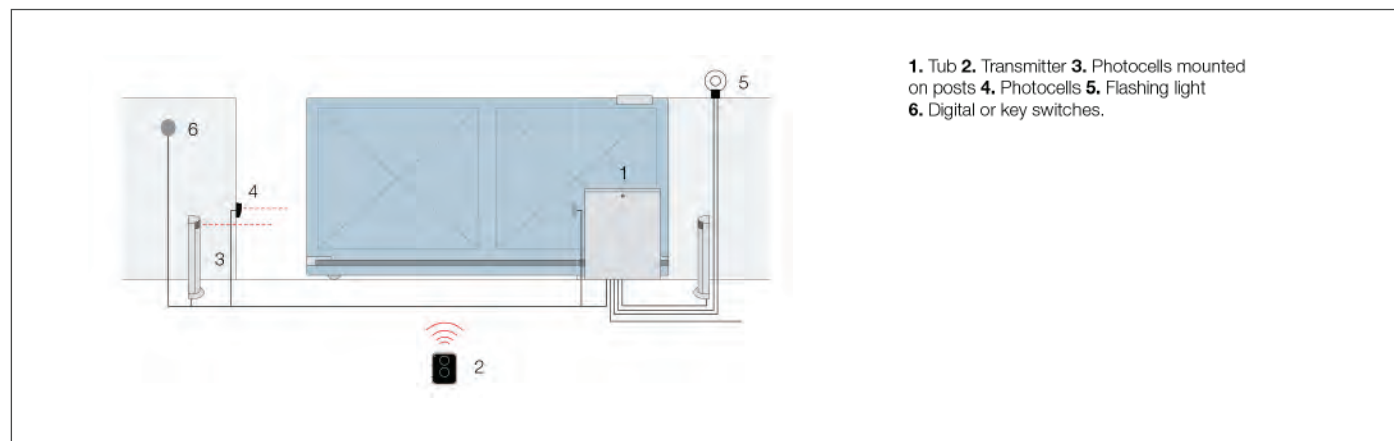

1. Tub 2. Transmitter 3. Photocells mounted on posts 4. Photocells 5. Flashing light 6. Digital or key switches.

For Gate Motor and Intercom Repairs, or Quotes on New Installations

Call the National Call Centre 011 463 3025 today

24 hour emergency 083 452 2015

repairs@gates.co.za / www.gates.co.za